
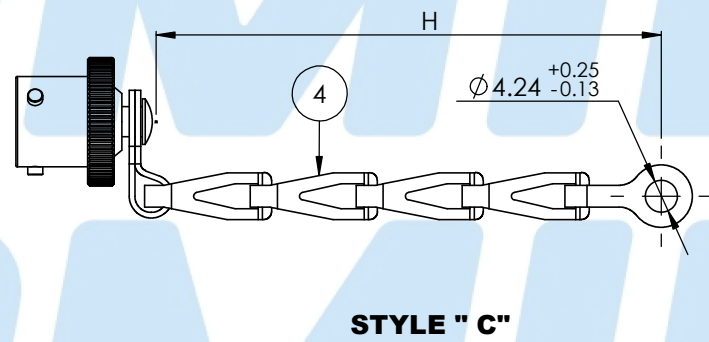


# PRODUCT DRAWING

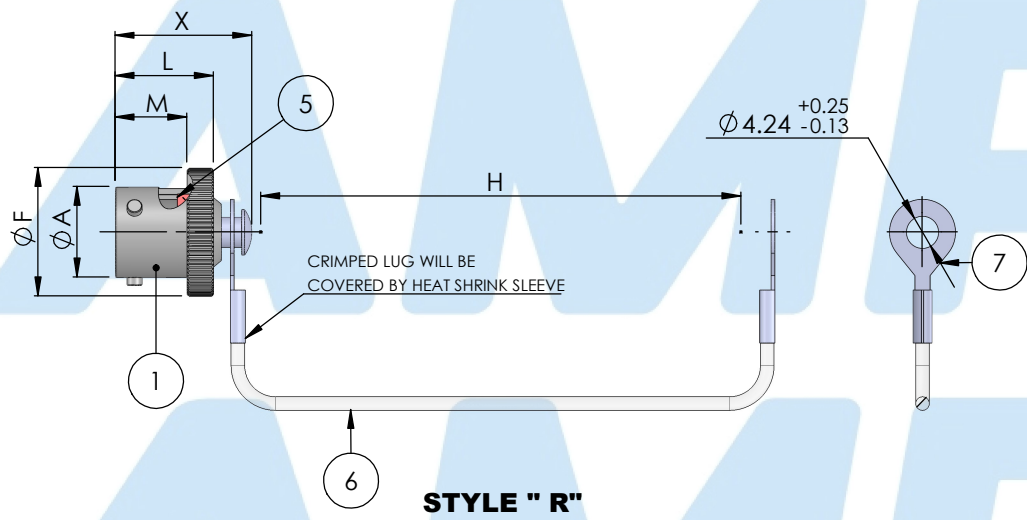

**STYLE "R"**

**STYLE "C"**

FOR ORDERING REFER AMPMIL  
"HOW TO ORDER DOCUMENT"

SHELL SIZE	ØF	ØA	M	X	L	H	ØE	ØD
	MAX	+0.03	+0.25 -0.0	MAX	MAX	+12.7 -6.35	MIN	MAX
8	18.26	12.01	9.35	19.84	14.27	76.2	14.68	22.62
10	21.44	14.99	9.35	19.84	14.27	76.2	17.86	25.4
12	25.4	19.05	9.35	19.84	14.27	88.9	22.63	30.18
14	28.58	22.22	9.35	19.84	14.27	88.9	25.81	36.53
16	31.75	25.4	9.35	19.84	14.27	88.9	28.98	39.67
18	34.92	28.58	9.35	19.84	14.27	88.9	32.16	42.88
20	38.1	31.75	10.92	21.44	15.88	101.6	35.33	46.02
22	41.28	34.92	10.92	21.44	15.88	101.6	38.51	49.23
24	44.45	38.1	11.76	22.22	16.71	101.6	41.68	52.37

NOTE :  
 1) "H" DISTANCE WILL BE FROM CENTER-TO-CENTER OF LUG HOLE  
 2) ROPE & CHAIN HAVE FREE ROTATION ON FASTENER  
 3) ALL COMPONENTS ARE COMPLIANCE TO THE MS3180 SPECIFICATION REQUIREMENTS

SPECIFICATION			
NO.	PART NAME	MATERIAL	REMARKS
01	SHELL	ALUMINIUM	AS PER ORDER
02	FASTENERS	STAINLESS STEEL	PASSIVATED
03	RING	STAINLESS STEEL	PASSIVATED
04	CHAIN	STAINLESS STEEL	PASSIVATED
05	GASKET	SILICON ELASTOMER	NATURAL
06	INSULATED ROPE	7STRAND STAINLESS STEEL	PASSIVATED
07	LUG	STAINLESS STEEL	PASSIVATED

THIRD ANGLE PROJECTION	UNSPECIFIED TOLERANCE .X ± 0.38 .XX ± 0.25 ANGLE ± 1° UNIT-MILLIMETER	<p><b>AMP MIL</b> RELIABLE CONNECTOR SOLUTIONS</p>	INDUSTRIAL TOWN, BANGALORE INDIA - 560010 PH : +91 6363911299 sales@ampmil.com www.ampmil.com							
DRAWN	RHK		<p>This document is the property of M/s. Ampmil Interconnect (P) Ltd., Rights of reproduction, utilization or disclosure to the third parties in any form whatsoever, is not allowed without the written consent of the Company.</p>							
CHECKED	RPT	DESCRIPTION		MIL-DTL-26482 SERIES I & II PROTECTIVE COVER FOR PLUG						
APR'VD	DSN	PART NUMBER	AP3180-XXX							
REV	ECN NO.	DESCRIPTION	DATE	APR'VD	DATE	SCALE - NTS	SHEET: 3 OF 1	(FOR XXX CONFIGURATION REFER HOW TO ORDER DOCUMENT)	REV	<b>A</b>

REV	ECN NO.	DESCRIPTION	DATE	APR'VD
A		INITIAL RELEASE		

REVISIONS DETAILS